

DEXIBELL

VIVO OS 05.00

Additional features compared to the previous software version.

1) Restyling of the new Factory Memories.

To ensure that the DEXIBELL stages line show their full timbral and effects potential, the DEXIBELL team redesigned the factory memories of all DEXIBELL stage line.

After loaded the new software version VIVO OS 05.00 you can proceed with the factory reset data function.

This way you can select the new memory data.

NOTE: Before loading the new software version VIVO OS 05.00 and proceeding to restore factory data, remember to make a backup of your instrument.

2) Into MEMORY environment It has been added the possibility to view all sounds set for each part.

Press twice the [MEMORY] button on panel, the display will show the following screen:




All 4 parts with their respective sounds are shown on the display.

Using the [< >] arrows buttons it is possible to select the previous or next memories.

3) The “Sound to FX” parameter has been added on EFFECT environment.

The “Sound To FX” parameter gives the possibility to freeze effects (FX-A, FX-B, FX-C) when changing sounds.

Press [MENU] button on panel, by [DATA/ENTRY] or arrows buttons select EFFECT environment, then select “Sound to FX” parameter.

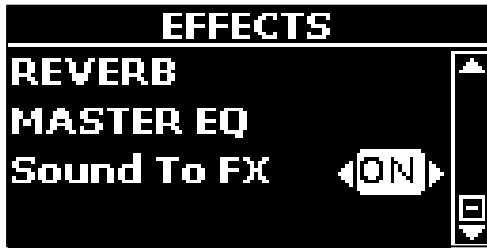


Setting the "Sound to FX" parameter to "ON" the last setting of FX-A, FX-B and FX-C of all parts is frozen when the sound changes.

Setting the "Sound to FX" parameter to "OFF" the setting of FX-A, FX-B and FX-C are recalled when the sound changes.

NOTE: This parameter is available in the Pedal/Switch Assign's function list for real-time use.

- 4) Into EFFECT FX environment a "Macro" parameter has been added for each type of FX.

This parameter allows to select different ready-to-use macro settings for each FX type.

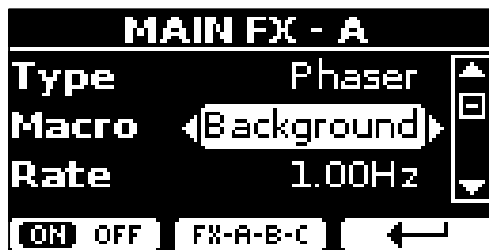



Using the [DATA/ENTRY] or [< >] arrows buttons it is possible to select macros FX.

- 5) Into T2L EDIT/Velocity Compand Curve environment it has been added the possibility to select different "macros" of Velocity Compand curve.

This function allows to select different ready-to-use macro settings of Velocity Compand curve for a quick set-up.

Press [MENU] and select T2L EDITOR, by [DATA/ENTRY] or arrows buttons select the part you want to edit the velocity curve and then select the Velocity Compand environment.

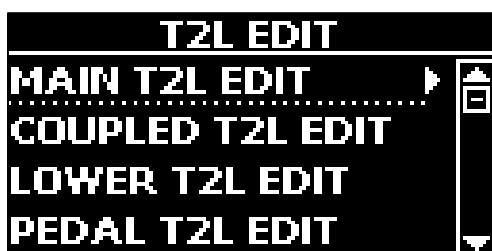

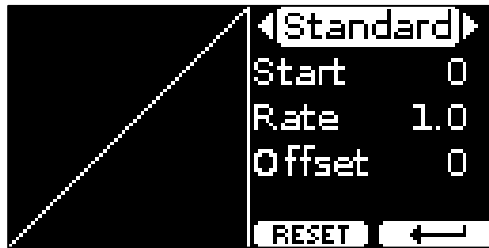

Into the Velocity Compand curve environment using the [DATA/ENTRY] or [<>] arrows buttons it is possible to select the available macros: Standard, Expand, Lift, Cap, Compressed, Trig.

- 6) In the SETTING environment for each of the 4 available parts, It has been added the possibility to set the range of minimum and maximum excursion values of the Expression, Modulation and Aftertouch functions assigned to the available controllers.

Press [MENU] button on panel, by [DATA/ENTRY] or arrows buttons select SETTING environment and choose the part you want to edit these parameters.



By [DATA/ENTRY] or arrows buttons select “Exp. Min” parameter to fix the minimum value of expression you desire when you move the expression to 0. By [DATA/ENTRY] or arrows buttons select “Exp. Max” parameter to fix the maximum value of expression you desire when you move the expression to 127.

By [DATA/ENTRY] or arrows buttons select “Mod. Min” parameter to fix the minimum value of modulation you desire when you move the modulation wheel to 0. By [DATA/ENTRY] or arrows buttons select “Mod. Max” parameter to fix the maximum value of modulation you desire when you move the modulation wheel to 127.

By [DATA/ENTRY] or arrows buttons select “AT. Min” parameter to fix the minimum value of aftertouch you desire when you release the aftertouch to 0. By [DATA/ENTRY] or arrows buttons select “AT. Max” parameter to fix the maximum value of aftertouch you desire when you press the aftertouch to 127.

NOTE: the Aftertouch is available only on VIVO S10 Piano Stage.

NOTE: if you set on all these controllers the minimum value to 127 and maximum value to 0 you can have the possibility to use these controllers in the reverse function.

7) A GLOBAL Transpose parameter has been added into GLOBAL memory area.

This parameter (not to be confused with the transpose function selectable from the panel) allows to set a value of global transpose for all parts of the instrument. The Global transpose is a global value of transpose which adds to the transpose value saved in the memories. It is not possible to save the global transpose on memory.

The value of global transpose parameter is saved into the global area, it means that at the next power on of the instrument the global transpose will be set.



Press [MENU] button on panel, by [DATA/ENTRY] or arrows buttons select GLOBAL environment and choose "Transpose" to edit the value of this parameter.

8) The METRONOME function has been added.

Press [MENU] button on panel, by [DATA/ENTRY] or arrows buttons select METRONOME environment and choose TEMPO.



Select the "120" Tempo value field to edit the value of tempo speed, select the "4/4" time signature field to edit it. Press the FUNCTION 1 [F1] button to start the metronome, press it again to stop the metronome.



Press [MENU] button on panel, by [DATA/ENTRY] or arrows buttons select METRONOME environment and choose BEAT SETTING.



By [DATA/ENTRY] or arrows buttons select the "Volume" value field to edit the level of metronome beat.

By [DATA/ENTRY] or arrows buttons select the "Downbeat" field (the first beat of a measure in music) to edit it. Select ON to activate the downbeat sound.

By [DATA/ENTRY] or arrows buttons select the "Click" field to set the beat resolution of metronome.

Press the FUNCTION 1 [F1] button to start the metronome, press it again to stop the metronome.

9) The MIDI transmission of Start/Stop (FA/FC) midi command has been added on the functions assignable of PEDAL ASSIGN 1, PEDAL ASSIGN 2, PEDAL ASSIGN 3, SWITCH ASSIGN 1 (not available on S2), and SWITCH 2 (not available on S2).

By [DATA/ENTRY] or arrows buttons select the CONTROL environment, select one of the available controllers assign and set the "MidiStartStop" function.



Any time you press the controller assigned to the "MidiStartStop" function, you send the Start (FA) and the Stop (FC) midi command via midi to an external device.

10) The “Virtual DAMPER” function has been added (already available on S2)

This function allows you to sustain notes even without using damper pedal. If you play a key and then press a second key without release the previous key, the sustain is automatically enabled.

By [DATA/ENTRY] or arrows buttons select the CONTROL environment and then select “DAMPER PEDAL”. By [DATA/ENTRY] or arrows buttons select “VirtualDamper” parameter. Set the “Virtual damper” parameter to ON if you want to apply the virtual damper function on your keyboard.




NOTE: when the “Virtual Damper” function is activated an AUTO HOLD icon appears on MASTER display.



NOTE: It is not possible to save the status of “Virtual Damper” parameter on Memories.

11) The CHORD ENHANCER and CHORD FREEZE functions has been added on the functions assignable of PEDAL ASSIGN 1, PEDAL ASSIGN 2 and PEDAL ASSIGN 3.


The CHORD ENHANCER function improves the sound plays automatic harmonies that are added to the chord that you are playing. The CHORD ENHANCER function works when a tone of the STRINGS, CHOIR, BRASS or PAD family is selected and the function is active.

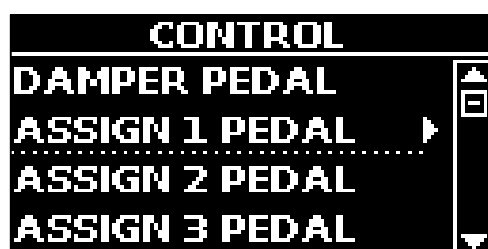

By [DATA/ENTRY] or arrows buttons select the CONTROL environment and select one of the available assign pedals controllers. By [DATA/ENTRY] or arrows buttons select the “Chord Enhancer” function.

The CHORD FREEZE function allows you to memorize a complex chord and play it in different tonality on the keyboard using a finger only.

Playing and holding the chord (at least two notes) on the keyboard that you want “Freeze”, press the CHORD FREEZE pedal Assign to memorize the chord. Now playing a note on the keyboard with the desired tonality, the chord previously memorized is reproduced with the same tonality of the played note.

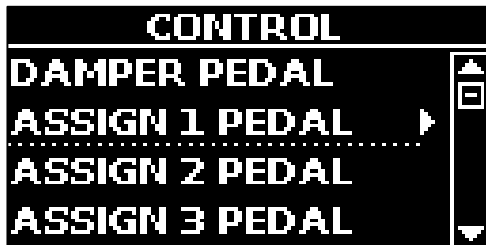

By [DATA/ENTRY] or arrows buttons select the CONTROL environment and select one of the available assign pedals controllers. By [DATA/ENTRY] or arrows buttons select the “Chord Freeze” function.

12) Several bugs fixed

DEXIBELL

VIVO OS 04.18

Additional features compared to the previous software version.

1) The AUDIO IN level can be saved as Global parameter.

The last set value of Audio IN level is saved on Global Memory when the S10/S10L will be switched off.

2) Several bugs fixed

DEXIBELL

VIVO OS 04.17

Additional features compared to the previous software version.

- 1) The Play/pause and Recorder On/Off functions has been added to the assign pedal 1, assign pedal 2, and assign pedal 3.**

The Play/pause and Recorder On/Off functions allow to control the Song using one of the 3 assign pedal available on the instrument.

Press MENU, select CONTROL, select ASSIGN PEDAL, select the new "Play/Pause" or "Rec On/Off" from the functions list to assign one of these two functions to the assign pedal.

- 2) Several bugs fixed**

DEXIBELL

VIVO OS 04.16

Additional features compared to the previous software version.

1) USB Audio works also with WINDOWS

USB Computer Port can send/receive digital AUDIO IN/OUT simultaneously with MIDI in all computers equipped with WINDOWS.

(MAC OSX and LINUX already worked in the previous software version).

Using the instrument with your Computer

If you use a A → B type USB cable (commercially available) to connect the USB COMPUTER port of your instrument to your computer's USB connector, you can record and play audio or/and MIDI data by your MIDI software (DAW software).

The instrument can transmit/receive audio streaming at 24 bit 48 Khz.

2) A PANIC FUNCTION shortcut has been added to be used in realtime

Press and hold the T2L button on panel to activate the Panic function, a brief message "PANIC DONE" will appear on display.

3) Delay Time up to 1000ms

On all DELAY effects, the time value of Delay R, Delay L, Delay C parameters has been increased up to 1000ms.

4) The "Monophonic" parameter has been added on the PEDAL part

On the PEDAL part has been added a "Monophonic" parameter that can set to AUTO or OFF. When the "Monophonic" parameter is set to AUTO, the PEDAL part automatically becomes monophonic when it used with the LOWER part.

When the "Monophonic" parameter is set to "OFF" the PEDAL part is always polyphonic.

5) Several bugs fixed

D E X I B E L L

VIVO OS 04.15

Additional features compared to the previous software version.

1) Several bugs fixed